

**METRIC SYSTEM**



**PORTFOLIO BROCHURE**

# **HIGH-PERFORMANCE COMPOSITE FILMS AND FABRIC SOLUTIONS**

**Partnerships that inspire.  
Materials that perform.**

**versiv**



## versiv COATED FABRICS

The **Versiv Coated Fabrics** range is ideal for manufacturers who need highest performance of materials efficiency in challenging processes. This diverse suite enables us to develop improved solutions for unique applications.

Dimensionally stable and chemically inert, these materials offer unique performance properties such as non-stick release, low friction and dielectric control, barrier protection, extreme temperature resistance, strength, and flexibility.



## versiv CAST AND COATED FILMS

**Versiv Cast and Coated Films** are temperature and chemical resistant materials, engineered to excel across a variety of diverse applications.

What sets our films apart is their adaptability. They are fully customisable, available with a variety of surface treatments – including anti-static and conductive coatings, pressure-sensitive adhesives, and more.



## versiv ADHESIVE TAPES

**Versiv Adhesive Tapes** have great temperature and chemical resistance and are used in various applications across many industries.

Available as PTFE-Coated Fabric and mono or multilayer PTFE Films, these tapes can be combined with the properties of silicone and acrylic adhesives, which provide secure bonding to various substrates.



## versiv MULTIMATERIAL COMPOSITES

**Versiv Multimaterial Composites** are strong, flexible, and customisable materials, engineered for applications in highly demanding environments.

This diverse range includes super-smooth, highly conformable and flex-resistant materials that are designed to excel in the harshest of conditions, or where highest reliability is a "must". Their applications can range from industrial and automotive to aerospace and communication sectors.



## Partnerships that inspire. Materials that perform.

### MANUFACTURING

Based in Ireland since 1980, our experienced, integrated manufacturing and development teams use a wide range of materials and processes to design and create fluoropolymer-coated products, cast films, pressure sensitive adhesive tapes and multimaterial composites that work in the most demanding environments.

We collaborate with customers globally to ensure that the materials we provide are suitable for their applications, offering technical support, design and development assistance, and material selection guidance throughout the process. Our key capabilities include:

- PTFE film casting and fabric coating
- Dip and reverse roll coating
- Multimaterial lamination (up to 7 layers)
- Fabric converting and fabrication
- Precision converting + die-cutting

You can rely on our sales and engineering teams to communicate effectively with you all the way through to project completion and beyond.

### CONVERTING & CUSTOMISATION

We aim to provide the right solution for our customers' requirements and place significant emphasis on investment in analytical testing and applications engineering, so that the materials you receive will perform as required.

Working with fluoropolymer-based films, fabrics, tapes and multimaterial composites, we offer converting and customisation services on our materials. These services include:

- Slitting
- Sheeting
- Surface treatment
- Fabrication
- Precision component die-cutting
- Tailor packaging and more

### CO-DEVELOPMENT & TESTING

We know that every customer's needs are unique – and sometimes what you require is a solution developed specifically for you.

Taking a collaborative, co-developmental approach, we work closely with you from the start and throughout our journey together – from drawing board, through prototyping, and application testing to up-scaling and industrialisation – to enhance performance with a custom solution.

Our materials go through rigorous environmental, durability and reliability assessments – ensuring products are fit to work in the harshest of environments. When bespoke solutions are needed, co-development sees us work together with partners to apply relevant tests and gather reliable data. Our co-partnered solutions include:

- Product customisation through material science
- Precision component die-cut
- Tailored packaging and customer specifications
- Different surface finishes and textures
- Excellent thickness control

### ENGINEERING CHALLENGES

Versiv composite materials are developed for manufacturers who strive for optimal performance, reliability and efficiency – no matter how demanding the process or operational environment.

Our materials offer barrier protection, dielectric control insulation and mechanical stability across a range of challenging conditions, such as withstanding temperature extremes or chemical exposure.

They also reduce friction to extend equipment lifespan and provide non-stick easy release properties to benefit applications where hygiene, productivity and efficiency are crucial.

# versiv COMPOSITES

For decades, Versiv Composites has been an expert in high-performance films, fabrics and adhesive tapes solutions. The core of our offering is **true versatility**, providing a comprehensive selection of material solutions on the market, designed with the most demanding applications in mind.

## VERSIONS ALSO AVAILABLE:

- AS** Anti-static
- TR** Tear-resistant
- 3** Silicone adhesive tape
- 4** Acrylic adhesive tape
- A3** Anti-static silicone adhesive tape

Find out more at:

[www.versivcomposites.com](http://www.versivcomposites.com)

The values presented are typical values and should not be used for specification purposes. Contact your representative for more information.

## CONTACT US

+353 65 90 80 170

[contact@versivcomposites.com](mailto:contact@versivcomposites.com)

Versiv Composites Limited  
Kilrush, Co. Clare, V15 NW27, Ireland



### CF103

**AS 3 Coated Fabric**

CF103 is characterised by a highly consolidated PTFE coating and smooth surface, which results in excellent non-stick and electrical insulation properties. Typical applications include coil and phase insulation on motors, baking release sheets and packaging machines.

Standard Widths	1000, 1525 mm
Weight	155 g/m <sup>2</sup>
Thickness	0.075 mm
Tensile Strength	130 x 90 N/cm
Trap Tear Strength	11 x 7 N
PTFE Content	69 %
Temperature Resistance	-150 to +260 °C
Dielectric Strength	3.8 kV



### CF203

**AS 3 Coated Fabric**

CF203 is the most popular and widely used thin PTFE-coated glass fabric. It provides good release properties for a wide range of applications. It is typically used as a non-stick surface in heat sealing packaging machines.

Standard Widths	1000, 1525, 2000 mm
Weight	130 g/m <sup>2</sup>
Thickness	0.070 mm
Tensile Strength	120 x 90 N/cm
Trap Tear Strength	13 x 9 N
PTFE Content	63 %
Temperature Resistance	-150 to +260 °C



### CF205

**AS TR 3 4 A3 Coated Fabric**

CF205 is the most widely used PTFE-coated glass fabric and is a versatile and robust release sheet material. It is typically used for non-stick applications in packaging and plastics, as release sheets, and as an "easy-glide" surface for other industries.

Standard Widths	1000, 1525 mm
Weight	250 g/m <sup>2</sup>
Thickness	0.120 mm
Tensile Strength	250 x 230 N/cm
Trap Tear Strength	18 x 15 N
PTFE Content	58 %
Temperature Resistance	-150 to +260 °C



### CF106-2

**AS 3 Coated Fabric**

CF106-2 is a dimensionally stable, heavily PTFE-coated glass cloth. It has excellent release properties and chemical resistance. Typical applications include covering of heat sealing platens/wires in the packaging industry, food processing and advanced composites production.

Standard Widths	1000, 1525, 2000 mm
Weight	315 g/m <sup>2</sup>
Thickness	0.145 mm
Tensile Strength	280 x 280 N/cm
Trap Tear Strength	16 x 17 N
PTFE Content	65 %
Temperature Resistance	-150 to +260 °C
Dielectric Strength	5.6 kV



### CF206

**3 A3 Coated Fabric**

CF206 is a highly consolidated PTFE-coated glass fabric with an extra glossy and smooth non-stick surface. It is typically used as a release sheet for covering PVC welding platens or on heat sealing packaging equipment as well as a non-stick covering for dryer cylinders.

Standard Widths	1010, 1525 mm
Weight	300 g/m <sup>2</sup>
Thickness	0.140 mm
Tensile Strength	280 x 260 N/cm
Trap Tear Strength	16 x 16 N
PTFE Content	65 %
Temperature Resistance	-150 to +260 °C

## SRF 206 Copper

Coated Fabric

SRF 206 Copper is a super smooth PTFE-coated glass cloth that provides superior release properties and excellent chemical resistance. It is typically used in polymer processing applications requiring very smooth and durable surface, such as uPVC window welding.

Standard Widths	1010 mm
Weight	250 g/m <sup>2</sup>
Thickness	0.120 mm
Tensile Strength	180 x 180 N/cm
Trap Tear Strength	10 x 11 N
PTFE Content	62 %
Temperature Resistance	-150 to +260 °C
Dielectric Strength	7.6 kV

## CL6 GX

3 Coated Fabric

CL6 GX is a multilayer PTFE-film laminated glass fabric. It is smooth and has a crack-free non-stick surface. It is typically used as platen covers for PVC welding and provides better and more durable performance than all other traditional coated release fabrics.

Standard Widths	1010 mm
Weight	325 g/m <sup>2</sup>
Thickness	0.160 mm
Tensile Strength	280 x 260 N/cm
Trap Tear Strength	18 x 15 N
PTFE Content	68 %
Temperature Resistance	-150 to +260 °C

## CF110-2

AS TR Coated Fabric

CF110-2 is a high-strength, very smooth PTFE-coated glass fabric with excellent release properties. The surface is specifically designed to be micro-crack free and resistant to oils and fats. It is typically used as a conveyor belt in contact grilling and polymer processing.

Standard Widths	1000, 1525 mm
Weight	540 g/m <sup>2</sup>
Thickness	0.250 mm
Tensile Strength	400 x 360 N/cm
Trap Tear Strength	27 x 29 N
PTFE Content	62 %
Temperature Resistance	-150 to +260 °C

## CF310

AS 3 4 A3 Coated Fabric

CF310 is one of the most popular PTFE-coated glass fabrics due to its combination of non-stick release properties and mechanical strength. It is typically used as a release sheet in heat sealing/packaging applications, a conveyor belt for plastic processing or a belt in industrial applications.

Standard Widths	1000, 1525 mm
Weight	470 g/m <sup>2</sup>
Thickness	0.220 mm
Tensile Strength	500 x 380 N/cm
Trap Tear Strength	38 x 33 N
PTFE Content	56 %
Temperature Resistance	-150 to +260 °C

## CF210-1

Coated Fabric

CF210-1 is a Versiv PTFE-coated woven glass fabric. It provides excellent release properties as well as chemical and wear characteristics over wide temperature ranges. Typical applications include release sheet, electrical insulation, belting and gasketing.

Standard Widths	1000, 1300, 1525 mm
Weight	490 g/m <sup>2</sup>
Thickness	0.235 mm
Tensile Strength	340 x 300 N/cm
Trap Tear Strength	30 x 30 N
PTFE Content	58 %
Temperature Resistance	-150 to +260 °C

## SRF310

Coated Fabric

SRF310 is a super smooth, dimensionally stable PTFE coated glass cloth that provides superior release properties and excellent chemical resistance. It is used in a variety of industrial applications that require mechanically strong and competitively priced release solution.

Standard Widths	1000 mm
Weight	470 g/m <sup>2</sup>
Thickness	0.220 mm
Tensile Strength	810 x 495 N/cm
Trap Tear Strength	92 x 65.5 N
PTFE Content	56 %
Temperature Resistance	-150 to +260 °C
Dielectric Strength	6.4 kV

## SRF310-2 Black

Coated Fabric

SRF310-2 Black is a super smooth, dimensionally stable PTFE-coated glass cloth that provides superior release properties. It has been specifically developed to provide long life and higher resistance to fats, oils and grease penetration.

Standard Widths	440, 650, 1100, 1350 mm
Weight	470 g/m <sup>2</sup>
Thickness	0.240 mm
Tensile Strength	460 x 400 N/cm
Trap Tear Strength	35 x 35 N
PTFE Content	56 %
Temperature Resistance	-150 to +260 °C
Surface Resistance	< 1 x 10 <sup>9</sup> Ω/cm <sup>2</sup>

## CLF910

Coated Fabric

CLF910 is a flexible and versatile multilayer PTFE-film laminated glass fabric. It provides excellent non-stick release properties, as well as increased wear and abrasion performance. It is specifically designed for use in food applications, e.g. contact grilling and fat frying.

Standard Widths	440, 650, 700, 1000 mm 1100, 1200, 1350, 1500 mm
Weight	590 g/m <sup>2</sup>
Thickness	0.295 mm
Tensile Strength	520 x 460 N/cm
Trap Tear Strength	40 x 38 N
PTFE Content	66 %
Temperature Resistance	-150 to +260 °C

## CF214-1 AS X

Coated Fabric

CF214-1 AS X is an anti-static, high gloss, super smooth PTFE-coated glass fabric. It offers excellent and durable release properties combined with high mechanical strength and dimensional stability.


Standard Widths	1525, 2000 mm
Weight	700 g/m <sup>2</sup>
Thickness	0.345 mm
Tensile Strength	600 x 500 N/cm
Trap Tear Strength	70 x 65 N
PTFE Content	59 %
Temperature Resistance	-150 to +260 °C
Surface Resistance	< 1 x 10 <sup>9</sup> Ω/cm <sup>2</sup>

## CF314

TR Coated Fabric

CF314 is a medium-weight PTFE-coated glass fabric. It is typically used as a non-stick surface in applications which require a high strength release sheet and regular replacement.

Standard Widths	1000, 1525 mm
Weight	630 g/m <sup>2</sup>
Thickness	0.305 mm
Tensile Strength	660 x 510 N/cm
Trap Tear Strength	70 x 50 N
PTFE Content	54 %
Temperature Resistance	-150 to +260 °C

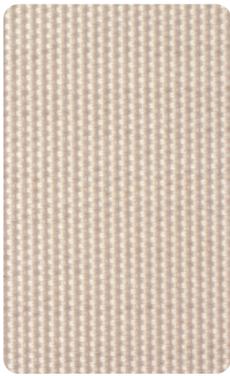

### CF4430 (313X)

Coated Fabric

CF4430 is a heavy duty belting fabric highly suitable for use in demanding high temperature environments where fabric texture is required. Its strength and rigidity make it ideal for use as large belts especially in the carpet and floor covering industries where rubber or PVC backings are being processed.

Standard Widths	2450 mm
Weight	1015 g/m <sup>2</sup>
Thickness	0.680 mm
Tensile Strength	700 x 900 N/cm
Trap Tear Strength	240 x 350 N
PTFE Content	41 %
Temperature Resistance	-150 to +260 °C



### CF910-1

Coated Fabric

CF910-1 is a lightly-coated porous PTFE glass fabric. It is typically used as a porous release fabric for moulding and curing applications such as composites where "off-gassing" is required. It is also used in packaging film welding to obtain clear texture and imprint at the seal closure area.

Standard Widths	1000, 1525 mm
Weight	240 g/m <sup>2</sup>
Thickness	0.195 mm
Tensile Strength	360 x 290 N/cm
PTFE Content	15 %
Temperature Resistance	-150 to +260 °C



### TCK106

Coated Fabric

TCK106 is a PTFE-coated aramid fabric with an extremely high tensile strength to thickness ratio. It is typically used in conveyor belt applications where a thin high-strength material is required. It is recommended for use in moist and steam environments.

Standard Widths	1250 mm
Weight	260 g/m <sup>2</sup>
Thickness	0.170 mm
Tensile Strength	400 x 400 N/cm
Trap Tear Strength	70 x 85 N
PTFE Content	71 %
Temperature Resistance	-73 to +220 °C




### ULTRA 3320 BR/BL

Coated Fabric

CL3320 ULTRA Brown/Black combines dimensional stability and excellent heat transfer with a highly engineered surface. It is commonly used in heat setting, lamination, chemical barriers, and food processing applications, in particular tortilla manufacturing.

Standard Widths	1015, 1350 mm
Weight	560 g/m <sup>2</sup>
Thickness	0.264 mm
Tensile Strength	560 x 395 N/cm
Trap Tear Strength	48 x 38 N
Temperature Resistance	-150 to +260 °C

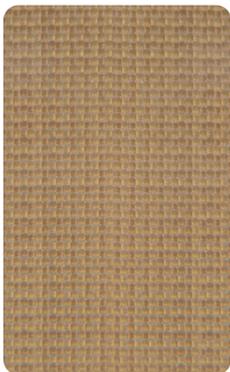

### TCK117 X

Coated Fabric

TCK117 X is an ultra-strong PTFE-coated woven aramid fabric that offers improved non-stick release performance and durability. Typical applications are conveyor belts for food processing and high-speed textile drying or various lamination processes.

Standard Widths	1800, 2600 mm
Weight	700 g/m <sup>2</sup>
Thickness	0.435 mm
Tensile Strength	800 x 1200 N/cm
Trap Tear Strength	120 x 180 N
PTFE Content	63 %
Temperature Resistance	-73 to +220 °C



### DF100

Film

DF100 is an isotropic, multilayer cast PTFE film produced using a proprietary process. It has a smooth and uniform surface with superior release, low permeability, and is pinhole and crack-free. It is commonly used as frame gaskets on electrolyzers and fuel cells, and in the production of decal substrates.

Standard Widths	450 mm
Thickness	0.025 to 0.127 mm
Tensile Strength	29.6 MPa
Elastic Modulus	413 MPa
Elongation	400 %
Dielectric Strength	4.20 kV



### CF903

Coated Fabric

CF903 is a lightly-coated porous PTFE glass fabric that provides controlled porosity. It is typically used as a porous release fabric for moulding and curing applications such as composites, where off-gassing is required.

Standard Widths	1000, 2000 mm
Weight	68 g/m <sup>2</sup>
Thickness	0.060 mm
Tensile Strength	130 x 90 N/cm
PTFE Content	29 %
Temperature Resistance	-150 to +260 °C



### DF2929N

Film

DF2929N is a polyimide-based composite coated with fluoropolymer. Durable and lightweight, it offers extra wear resistance and excellent insulation properties. With its very low, consistent coefficient of friction, this product is used in very demanding applications such as electronics, automotive and medical.

Standard Widths	1000 mm
Thickness	0.066 mm
Adhesion	6.85 N/cm
Elongation	72 %
Dielectric Strength	7.0 kV
Surface Roughness	0.46 µm



### CF905-2

Coated Fabric

CF905-2 is a PTFE coated glass fabric which provides controlled porosity. This material is used in applications where there is a need for a textured surface and/or airflow through the fabric, such as composite moulding and curing.

Standard Widths	1000, 1525 mm
Weight	130 g/m <sup>2</sup>
Thickness	0.115 mm
Tensile Strength	310 x 290 N/cm
PTFE Content	19 %
Temperature Resistance	-150 to +260 °C



### SPSA-5 S

Film Adhesive Tape

SPSA-5 S is a high quality skived PTFE film coated with silicone adhesive on one side. It provides the unique characteristics of PTFE in a form suitable for application as a surface liner to wood, metal or plastic. A separate liner is applied to the adhesive surface for ease of application.

Standard Widths	1000 mm
Base PTFE Fabric Weight	280 g/m <sup>2</sup>
Base Thickness	0.130 mm
Adhesive Thickness	0.045 mm
180° Peel Adhesion Strength	5.8 N/cm
Polyken Tack	550 g
Temperature Resistance	-73 to +260 °C



### CLPSA 4 S **Coated Fabric** **Adhesive Tape**

CLPSA 4 S is a flexible, composite that combines the features of multi-layer cast films with the mechanical properties of glass fabric. Coated with a high performance, silicone adhesive, CLPSA 4 S and has been a product of choice for polymer and epoxy processing applications.

Standard Widths	1010 mm
Base PTFE Fabric Weight	210 g/m <sup>2</sup>
Base Thickness	0.110 mm
Adhesive Thickness	0.045 mm
180° Peel Adhesion Strength	4.7 N/cm
Tensile Strength	150 x 120 N/cm
PTFE Content	77 %
Temperature Resistance	-73 to +260 °C



### CS203 S **Coated Fabric** **Adhesive Tape**

CS203 S is a PTFE-coated fabric with a high performance, silicone pressure-sensitive adhesive on one side. The product has a yellow corrugated liner to protect the adhesive surface and to ease identification and use.

Standard Widths	1000 mm
Base PTFE Fabric Weight	130 g/m <sup>2</sup>
Base Thickness	0.070 mm
Adhesive Thickness	0.045 mm
180° Peel Adhesion Strength	5.3 N/cm
Tensile Strength	120 x 90 N/cm
PTFE Content	63 %
Temperature Resistance	-73 to +260 °C



### CS205 S **Coated Fabric** **Adhesive Tape**

CS205 S is a PTFE-coated fabric with a high performance, silicone pressure-sensitive adhesive on one side. The product has a yellow corrugated liner to protect the adhesive surface and to ease identification and use.

Standard Widths	1000, 1010 mm
Base PTFE Fabric Weight	250 g/m <sup>2</sup>
Base Thickness	0.120 mm
Adhesive Thickness	0.045 mm
180° Peel Adhesion Strength	4.7 N/cm
Tensile Strength	230 x 230 N/cm
PTFE Content	58 %
Temperature Resistance	-73 to +260 °C



### CS206 S **Coated Fabric** **Adhesive Tape**

CS206 S is a PTFE-coated fabric with a high performance, silicone pressure-sensitive adhesive on one side. The product has a yellow corrugated liner to protect the adhesive surface and to ease identification and use.

Standard Widths	1010 mm
Base PTFE Fabric Weight	300 g/m <sup>2</sup>
Base Thickness	0.140 mm
Adhesive Thickness	0.045 mm
180° Peel Adhesion Strength	6.3 N/cm
Tensile Strength	280 x 260 N/cm
PTFE Content	65 %
Temperature Resistance	-73 to +260 °C



### CS310 S **Coated Fabric** **Adhesive Tape**

CS310 S is a PTFE-coated fabric with a high performance, silicone pressure-sensitive adhesive on one side. The product has a yellow corrugated liner to protect the adhesive surface and to ease identification and use.

Standard Widths	1000 mm
Base PTFE Fabric Weight	470 g/m <sup>2</sup>
Base Thickness	0.220 mm
Adhesive Thickness	0.045 mm
180° Peel Adhesion Strength	7.5 N/cm
Tensile Strength	500 x 380 N/cm
PTFE Content	56 %
Temperature Resistance	-73 to +260 °C

## SOLUTIONS FOR

HIGHER QUALITY FINISHES

CONSISTENT PRODUCTION PROCESSES

IMPROVED PRODUCTIVITY AND COST EFFECTIVENESS



## CRAFTING EXCELLENCE SINCE 1980

Our facility has been situated in west Clare, Ireland, for over 40 years.



**versiv**

**Partnerships that inspire.  
Materials that perform.**

Versiv is a recognised expert in high-performance, technology-driven, fluoropolymer-based materials and customised solutions. With over 40 years' experience, our films, fabrics, tapes and multimaterial composites are highly regarded in various B2B industries, with renowned companies among our clients.

Our specialty offering meets the diverse needs of customers seeking high-performance materials, that take on demanding tasks, in providing everything from safe and protective barriers, easy-release surfaces, dielectric insulation and friction control.

We adapt to make even more possible. Our collaborative, co-partnership approach inspires the success of our customers and the evolution of our capabilities, enabling us to deliver top-notch, off-the-shelf products and co-developed solutions.



**versiv**

versiv  
RECEPTION

versiv  
VISITOR  
PARKING

versiv  
VISITOR  
PARKING

## CONTACT US

+353 65 90 80 170

contact@versivcomposites.com

Versiv Composites Limited  
Kilrush, Co. Clare, V15 NW27, Ireland

[www.versivcomposites.com](http://www.versivcomposites.com)